Medical, Laboratory, Pharmacy, & Life Science Cold Storage

accucold

Purpose-Built Equipment For Institutional Applications

ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001:2015 CERTIFIED • 888.4.MEDLAB • INFO@ACCUCOLD.COM • ACCUCOLD.COM

accucold

The Accucold Difference

Accucold, a division of Felix Storch, Inc., specializes in manufacturing purpose-built refrigeration products for the medical, pharmaceutical, laboratory, and institutional industries. Our extensive product selection offers a range of cooling solutions, from basic locking compact refrigerators to built-in vaccine storage units specially designed to comply with **CDC and VFC guidelines**. We are **ISO 9001:2015 certified** and maintain an ISO/IEC 17025:2015 certified calibration laboratory for our monitoring equipment.

MED/LAB/PHARMACY REFRIGERATION 3

Performance Series Refrigeration Highlights 4
New Options for Optimized Storage & Security 5
Pharma-Vac Performance Series Refrigerators 6-7
Pharma-Lab Performance Series Refrigerators & Freezers 8-9
Med-Lab Performance Series Refrigerators 10-11
MED2 Series Medical All-Freezers 12-13
ACR Series Pharmaceutical Refrigerators 14
Stacked Refrigerator-Freezer Combinations 15

PATIENT CARE/HOSPITAL/BREAK ROOM 16

PURETHERM Blanket Warmers 17
JCAHO Compliant Nutrition Centers 18
Break Room Refrigerator-Freezers 19
MOMCUBE Series Breast Milk Refrigeration 20-21
Microwaves 22
Icemakers & Dispensers 23
Portable Refrigerator/Freezers 24

GENERAL PURPOSE/NSF-7 Refrigeration 25

Healthcare Series Refrigerators & Freezers 26
PLUS2 Series Refrigerators & Freezers 27
Low Temperature Freezers 28
Commercial Chest Refrigerators & Freezers 29

Options & Accessories 30-31

MED/LAB/PHARMACY REFRIGERATION

Accucold's Performance Series features purpose-built equipment specially designed and constructed to meet the demanding storage needs of medical, laboratory, vaccine, and life science applications.

Performance Series Refrigeration

Solid & glass door choices from 1 to 49 cu.ft.

Purpose-built with advanced features to help support CDC and VFC guidelines for proper vaccination storage:

- Audible alarms for hi/lo temp., power out, & open door
- Keyed lock for secure interior
- Intelligent microprocessor control panel with password protection
- Optimized forced air cooling for fast temp. recovery
- Digital display of the current & hi/lo temp.
- LED lighting for an efficient display
- Self-closing door with easy-grip handle
- Adjustable plastic-coated wire shelves
- Durable interior construction from powder-coated steel

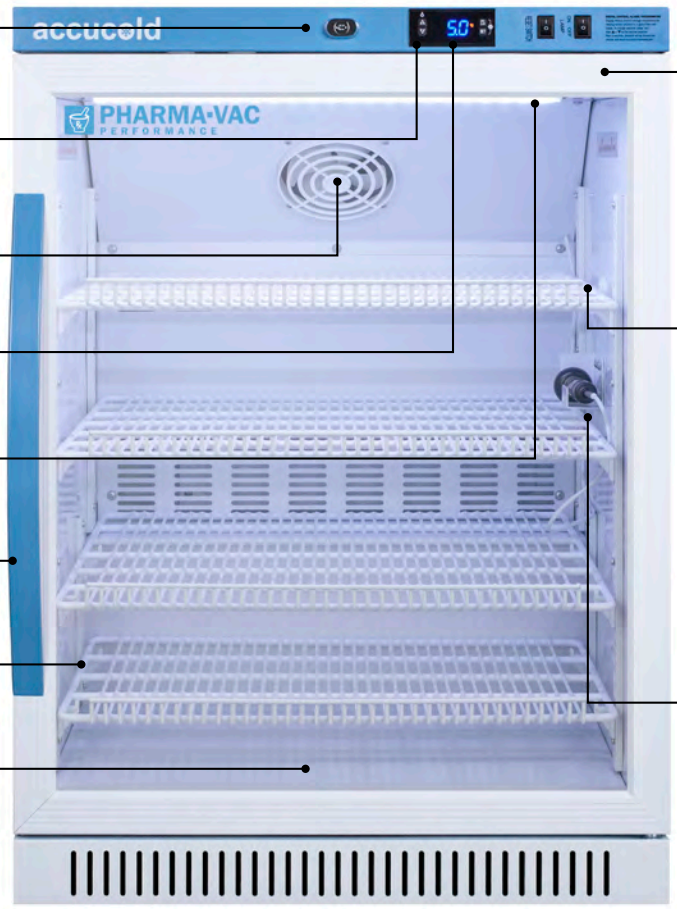

- Remote contacts

- Access port



- Buffered probe in glycol-filled bottle

EXTENDED WARRANTY
- 2-year parts & labor
- 5-year compressor

ECO-FRIENDLY
Environmentally friendly hydrocarbon refrigerants

COMPATIBLE
with Pyxis®, Omnicell®, & AcuDose RX®

Adjustable operating control range: 2 to 8ºC • Temperature variation: +/- 1ºC*

*The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24-hour test period

New Options for Optimized Storage & Security

Ventilated Drawers

Full-extension removable drawers made from powder-coated aluminum, factory-installed in any 24” wide Pharma-Vac or Med-Lab refrigerator

Suffix “DR”

Locker Compartments

Interior lockers secured by combination locks for separated storage. Staff can set their own security code and override with provided keys

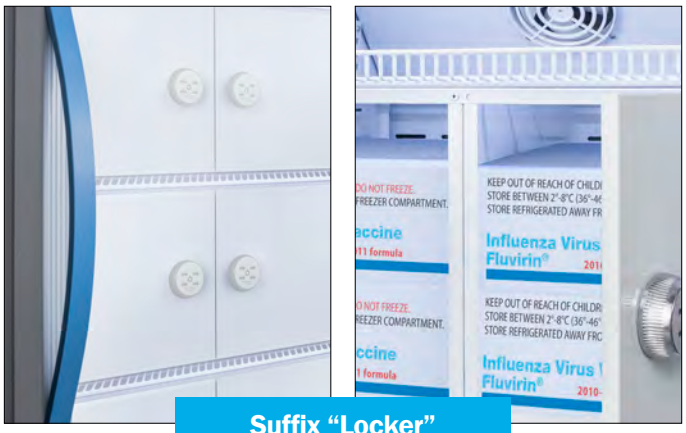

Suffix “Locker”

Keyless Access Locks

No keys required with a keypad security system that allows you to program up to 19 codes to accommodate your staff. Available as a factory-installed option on all Performance Series units

Add Option “KAL”

Digital Data Loggers

NIST calibrated loggers with internal storage and removable USB drives for virtually unlimited data storage. Loggers are calibrated in our ISO/IEC 17025:2015 certified laboratory and display the current and min/max temperatures in Celsius and Fahrenheit

Add Option “DL2B”

All units can be combined with Accucold freezers using our stacking racks

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Pharma-Vac Performance Series

Purpose-built for pharmacy, medication, and vaccination applications to support meeting **CDC/VFC vaccine storage guidelines**

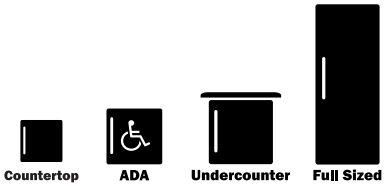

Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
Additional sensor reads interior air temperature for superior temperature control
Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)
Digital display of the min/max temperature (updated in 15 minute increments)
Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
Password protection of control parameters beyond setpoint
Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading

Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions
Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
Audible power failure and sensor failure alarms
Mute function for alarms
Remote alarm contacts in rear of the unit

Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch
Adjustable plastic-coated wire shelves for improved circulation
Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
Adjustable cycle defrost operation
½" probe port included to accept user-provided monitoring equipment

Quality Design For Reliable Performance

Self-closing door offers added storage protection
User-reversible door swing (self-closing function compatible with RHD position only)
Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Convenient security with a top-mounted door lock (2 keys included)
Magnetic gaskets to ensure a positive seal
Compatible with Pyxis®, Omnicell® and AcuDose RX®

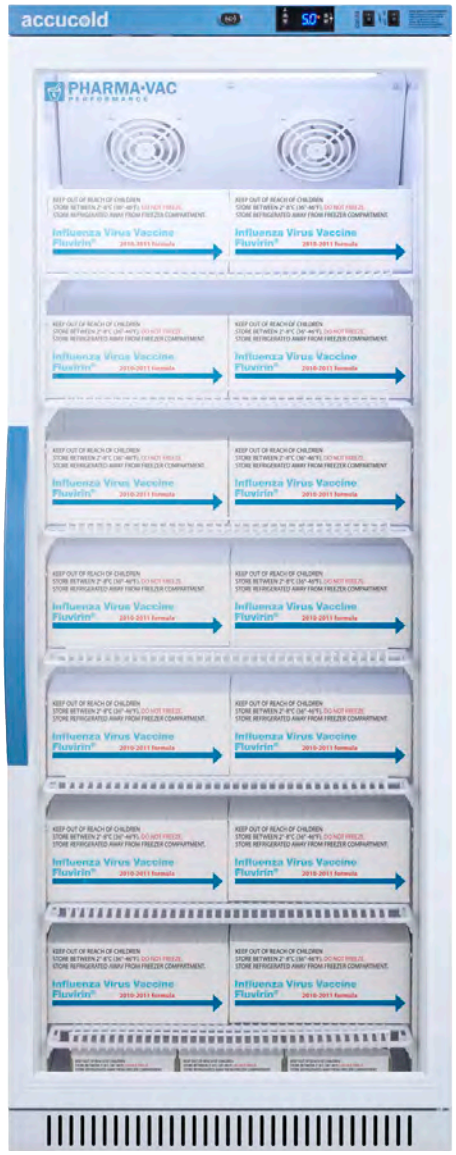

SKU: ARG12PV

Remote contacts

Temperature sensor in glycol bottle

Microprocessor digital temperature control

PHARMA-VAC PERFORMANCE

New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5

ARS1PV | ARG3PV | ARG8PV | ARS12PV | ARG15PVLOCKER

Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operationg control range: 2 to 8°C (35.6 to 46.4°F)
Temperature variation: +/- 1°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:

2 keys
Do Not Unplug removable sticker
Do Not Adjust Temperature removable sticker
Do Not Store Personal Items removable sticker
User manual

DESIGNED TO PROVIDE +/-1°C VARIATION
The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Extended Warranty
2-year parts & labor
5-year compressor

Eco-Friendly
Uses environmentally friendly hydrocarbons for a greener footprint

Compatible
with Pyxis®, Omnicell®, & AcuDose RX®

Logging Option
Add our D2LB data logger for additional assurance

	MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV	1 cu.ft.	21.5" x 17.5" x 19.75"	White	White	3	0.6	70 lbs
🔒	ARG1PV	1 cu.ft.	21.5" x 17.5" x 19.75"	Glass	White	3	0.6	73 lbs
🔒	ARS3PV	3 cu.ft.	34" x 18.5" x 19"	White	White	4	0.6	90 lbs
🔒	ARG3PV	3 cu.ft.	34" x 18.5" x 19"	Glass	White	4	0.6	95 lbs
🔒	ARS6PV	6 cu.ft.	32.5" x 23.38" x 24.38"	White	White	4	0.75	120 lbs
🔒	ARG6PV	6 cu.ft.	32.5" x 23.38" x 24.38"	Glass	White	4	0.75	125 lbs
🔒	ARS8PV	8 cu.ft.	50" x 23.38" x 24.38"	White	White	7	1.4	170 lbs
🔒	ARG8PV	8 cu.ft.	50" x 23.38" x 24.38"	Glass	White	7	1.4	175 lbs
🔒	ARS12PV	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	7	1.4	185 lbs
🔒	ARG12PV	12 cu.ft.	61.75" x 23.38" x 24.38"	Glass	White	7	1.4	190 lbs
🔒	ARS15PV	15 cu.ft.	72" x 23.38" x 24.38"	White	White	7	1.4	215 lbs
🔒	ARG15PV	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	7	1.4	215 lbs
🔒	ARS15PVLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	White	White	8 lockers	1.4	250 lbs
🔒	ARG15PVLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	8 lockers	1.4	250 lbs

All units can be combined with Accucold freezers using our stacking racks

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Pharma-Lab Performance Series

Refrigerators and freezers designed and **purpose-built to meet the demanding needs for pharmacy, medication, vaccine, laboratory, and life science applications**

Countertop | ADA | Undercounter | **Full Sized**

Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Precise temperature control supports meeting the CDC/VFC storage guidelines
Improved temperature accuracy with a separate temperature probe for continuous product readout
Additional sensor reads interior air temperature for superior temperature control
Adjustable operating control range; Refrigerators: +2°C to +10°C (+35.6° F to +50° F)/ Freezers: -30ºC to -15ºC (-22ºF to +5ºF)
Digital display of the min/max temperature (updated in 15 minute increments)
Temperature viewable in Celsius or Fahrenheit to the nearest degree
Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading

Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions
Open door alarm will sound at different levels when the door is left ajar for times starting at 30 seconds
Condenser cleaning alarm sends audible and visual signal every six months

Fully Featured Interior For Convenient Storage

Adjustable plastic-coated wire shelves for improved circulation
Multiple shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items
Interior LED lighting for an energy efficient presentation
Adjustable cycle defrost operation

Quality Design For Reliable Performance

Complete stainless steel construction inside and out for easier cleanup
Glass door models feature anti-condensate door frame heater to ensure a clear view
Self-closing door helps to protect contents, but will also remain open when the door is opened at a 90º angle for easier loading
Ships with 6" high commercial locking casters for optional installation
Factory-installed locks located towards the top of the unit for convenient security
Sealed back for a space-saving design that's easier to clean
Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Quality door gaskets ensure a tight seal for energy savings and improved performance

SKU: ARG23ML

6" high locking castors

Adjustable shelving

Microprocessor digital temperature control

PHARMA-LAB PERFORMANCE

ARS23ML

ARG49ML

AFS49ML

Technical Specifications (All Units)

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensor: 2 (air probe & product probe)
Adjustable operating control range: 2 to 10°C (refrigerators)/-30 to -15°C (freezers)
Shelving: White plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a (refrigerators)
Eco-friendly R290a (Freezers)
Light: LED

Door: RHD/LHD or French (double door)
Fan: Internal
Certifications: UL, UL-C, ETL-S
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:
2 keys
User manual

Designed to operate within +/-1.5°C (Refrigerators) or +/-2.5°C (Freezers) of setpoint. Freezers with auto defrost may see temperature excursions beyond this during defrost. The published temperature variation is derived from the maximum deviation of a NTC sensor in 1 oz. vial located nearest the chamber geometric center during a 24hr test period.

Extended Warranty
2-year parts & labor
5-year compressor

Eco-Friendly
Uses environmentally friendly hydrocarbons for a greener footprint

Logging Option
Add our D2LB data logger for additional assurance

Commercially Approved
ETL-S listed to NSF-7 commercial standards

Refrigerators

MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
ARS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	7.5	292 lbs
ARS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	7.5	292 lbs
ARG23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	RHD	4	7.5	292 lbs
ARG23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	LHD	4	7.5	292 lbs
ARS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	7.5	430 lbs
ARG49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Glass	Stainless Steel	French	8	7.5	450 lbs

Freezers

MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
AFS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	8	292 lbs
AFS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	8	292 lbs
AFS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	10.5	450 lbs

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Med-Lab Performance Series

Medical grade, temperature-controlled solutions to **meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications**

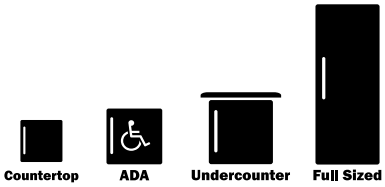

Advanced Temperature Control

Intelligent microprocessor digital temperature controller
Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
Additional sensor reads interior air temperature for superior temperature control
Adjustable operating control range from +2°C to +10°C (+35.6°F to +50°F)
Digital display of the min/max temperature (updated in 15 minute increments)
Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
Password protection of control parameters beyond setpoint
Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading

Multiple Alarms For Safer Monitoring

Audible/visual alarms for high/low temperature excursions
Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
Audible power failure and sensor failure alarms
Mute function for alarms
Remote alarm contacts in rear of the unit

Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch
Adjustable plastic-coated wire shelves for improved circulation
Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
Adjustable cycle defrost operation
½" probe port included to accept user-provided monitoring equipment

Quality Design For Reliable Performance

Self-closing door offers added storage protection
User-reversible door swing (self-closing function compatible with RHD position only)
Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Convenient security with a top-mounted door lock (2 keys included)
Magnetic gaskets to ensure a positive seal
Compatible with Pyxis®, Omnicell® and AcuDose RX®

SKU: ARG3ML

Remote Contacts

Temperature sensor in glycol bottle

Microprocessor digital temperature control

MED-LAB PERFORMANCE

New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5

ARG6ML ARS6ML ARS8ML ARS15MLLOCKER

Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operationg control range: +2°C to +10°C (+35.6°F to +50°F)
Temperature variation: +/- 1°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:

2 keys
Do Not Unplug removable sticker
Do Not Adjust Temperature removable sticker
Do Not Store Personal Items removable sticker
User manual

DESIGNED TO PROVIDE +/-1°C VARIATION
The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Extended Warranty
2-year parts & labor
5-year compressor

Eco-Friendly
Uses environmentally friendly hydrocarbons for a greener footprint

Compatible
with Pyxis®, Omnicell®, & AcuDose RX®

Logging Option
add our D2LB data logger for additional assurance

	MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	White	White	3	0.6	70 lbs
🔒	ARG1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	Glass	White	3	0.6	73 lbs
🔒	ARS3ML	3 cu.ft.	34" x 18.5" x 19"	White	White	4	0.6	90 lbs
🔒	ARG3ML	3 cu.ft.	34" x 18.5" x 19"	Glass	White	4	0.6	95 lbs
🔒	ARS6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	White	White	4	0.75	120 lbs
🔒	ARG6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	Glass	White	4	0.75	125 lbs
🔒	ARS8ML	8 cu.ft.	50" x 23.38" x 24.38"	White	White	7	1.4	170 lbs
🔒	ARG8ML	8 cu.ft.	50" x 23.38" x 24.38"	Glass	White	7	1.4	175 lbs
🔒	ARS12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	7	1.4	185 lbs
🔒	ARG12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	Glass	White	7	1.4	190 lbs
🔒	ARS15ML	15 cu.ft.	72" x 23.38" x 24.38"	White	White	7	1.4	215 lbs
🔒	ARG15ML	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	7	1.4	215 lbs
🔒	ARS15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	White	White	8 lockers	1.4	250 lbs
🔒	ARG15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	8 lockers	1.4	250 lbs

All units can be combined with Accucold freezers using our stacking racks

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

MED2
Medical Freezers

Countertop, ADA compliant, and undercounter all-freezers designed to provide **improved temperature control** and **convenient features for pharmacy, vaccine, medical, biological, laboratory, life science, and industrial storage applications**

Countertop | ADA | Undercounter | Full Sized

Advanced Temperature Control

Digital control panel for easy temperature management
Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree
Choices for -25 or -20°C freezer storage

NIST Calibrated Monitoring

Alarm/thermometer with external readout of the current and high/low temperature
Buffered temperature probe in glycol-filled bottle
Certificate of NIST calibration included (2 years)
Audible alarm for high/low temperature excursions

User-Friendly Features

Adjustable shelves or slide-out drawers for easy storage
Hospital grade cord and plug for added assurance in high traffic settings
Front-breathing options for built-in installation under counters
⅜" access port included for additional monitoring equipment

Quality Design For Reliable Performance

Factory-installed locks front-located for convenient security
Powerful magnetic door gaskets to ensure a tight seal for energy savings and improved performance

SKU: VT65MLBIMED2ADA

Storage baskets with plastic fronts for added protection

User-friendly control panel with integrated alarm & thermostat

accucold

FS24LMED2

FS30LMED2

VT65MLBI7MED2

Technical Specifications (All Units):

Defrost type: Manual
Thermostat: Intelligent microprocessor digital
Temperature sensor: 1 (product probe)
Shelving: White plastic coated wire or slide-out plastic baskets
Voltage: 115V/60Hz
Cord: NEMA 5-15P with hospital grade plug
Lock: Factory-installed key lock
Door: RHD; factory reversible to LHD upon order
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:

2 keys
User manual
Certificate of calibration

DESIGNED TO PROVIDE +/-4°C VARIATION
The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Extended Warranty

2-year parts & labor
5-year compressor

Logging Option

add our D2LB data logger for additional assurance

NIST Certified

Continuous temperature display calibrated to NIST standards in our ISO/IEC 17025:2015 certified laboratory

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS*
🔒	FS24LMED2	1.4 cu.ft.	21.38" x 18.5" x 17.63"	White	White	1 wire	Freestanding	0.8	42 lbs	ETL, ETL-C
🔒	FS24L7MED2	1.4 cu.ft.	21.75" x 18.5" x 17.63"	White	White	1 wire	Freestanding	0.8	42 lbs	ETL, ETL-C, ETL-S
🔒	FS30LMED2	1.8 cu.ft.	24.63" x 18.5" x 17.75"	White	White	2 wire	Freestanding	0.8	53 lbs	ETL, ETL-C
🔒	FS30L7MED2	1.8 cu.ft.	26.5" x 18.5" x 17.75"	White	White	2 wire	Freestanding	0.8	53 lbs	ETL, ETL-C, ETL-S
🔒	VT65MLBIMED2	3.5 cu.ft.	33.5" x 23.63" x 23.63"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	ETL, ETL-C
🔒	VT65MLBIMED2ADA	3.5 cu.ft.	32" x 23.63" x 23.50"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	ETL, ETL-C
🔒	VT65MLBI7MED2	3.5 cu.ft.	33.75" x 23.63" x 23.5"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
🔒	VT65MLBI7MED2ADA	3.5 cu.ft.	32" x 23.63" x 23.50"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S

All units can be combined with Accucold refrigerators using our stacking racks

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

ACR Pharmacy Refrigerators

ADA compliant and full-sized **all-refrigerators** designed for the **reliable storage of pharmaceuticals, vaccines, and medical/biological substances**

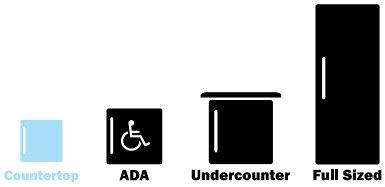

Features

Commercially listed to NSF-7 standards and UL-471
LED lighting for a bright but efficient interior view
Double pane tempered glass door to protect stored items (select units)
Stainless steel interior construction on full-sized units for added durability and easier cleanup
Self-closing door for added protection (select units)
Factory-installed lock to provide added security
Fan-cooled interior ensures even temperature distribution
Digital control panel with a +2 to 8°C temperature range
Hospital grade cord and plug for added assurance in high traffic settings

Drawer option available for easy installation inside the unit.

SKU: ACR45L

SKU: ACR1718RH

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	ACR45L	2.6 cu.ft.	31.5” x 19.5” x 22.75”	White	White	Reversible	3 wire	1	89 lbs	ETL, ETL-C, ETL-S
🔒	ACR1415RH	14 cu.ft.	66” x 23.63” x 24.25”	Glass	Stainless Steel	RHD	4 molded plastic	4.4	177 lbs	ETL, ETL-C, ETL-S
🔒	ACR1415LH	14 cu.ft.	66” x 23.63” x 24.25”	Glass	Stainless Steel	LHD	4 molded plastic	4.4	177 lbs	ETL, ETL-C, ETL-S
🔒	ACR1718RH	17 cu.ft.	79.25” x 27.63” x 24.75”	Glass	Stainless Steel	RHD	6 molded plastic	5	220 lbs	ETL, ETL-C, ETL-S
🔒	ACR1718LH	17 cu.ft.	79.25” x 27.63” x 24.75”	Glass	Stainless Steel	LHD	6 molded plastic	5	220 lbs	ETL, ETL-C, ETL-S

Stacked Refrigerator-Freezer Combinations

Pharma-Vac refrigerators stacked with MED2 freezers create **all-purpose combinations** that provide reliable storage in slimmer fitting footprints

Countertop ADA Undercounter **Full Sized**

Features

Easy assembly with our stacking rack
Takes up less than 24" of floor space for an easier fit in facilities
Fully featured with our PV and MED2 packages
Access ports included with both units
External temperature readout as recommended by the CDC
Independent refrigerator and freezer operation for optimum performance
High/low temperature alarms installed in both units
Locking doors with separate keys
Extended warranty with 2 years parts & labor/5 years compressor

StackRack lets you combine virtually any two units

SKU: ARS6PV-VT65MLSTACKMED2

SKU: ARG8PV-FS24LSTACKMED2

	SKU	CAPACITY (REF/FRZ)	HEIGHT x WIDTH x DEPTH	DOOR (REF/FRZ)	CABINET	SHELVES (REF/FRZ)	AMPERAGE (REF/FRZ)	CERTIFICATIONS
🔒	ARS6PV-VT65MLSTACKMED2	6/3.2 cu.ft.	68" x 23.63" x 24.38"	White	White	4/3	.75/1.3	ETL, ETL-C
🔒	ARG6PV-VT65MLSTACKMED2	6/3.2 cu.ft.	68" x 23.63" x 24.38"	Glass/White	White	4/3	.75/1.3	ETL, ETL-C
🔒	ARS8PV-FS24LSTACKMED2	8/3.2 cu.ft.	73.5" x 23.38" x 24.38"	White	White	7/1	1.4/.8	ETL, ETL-C
🔒	ARG8PV-FS24LSTACKMED2	8/3.2 cu.ft.	73.5" x 23.38" x 24.38"	Glass/White	White	7/1	1.4/.8	ETL, ETL-C

*** All units can be manufactured with a left hand door swing. Add option "LHD" upon order**
Additional combinations available by special order

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

PATIENT CARE/ HOSPITAL/BREAK ROOM

From basic refrigeration and towel warming cabinets to breast milk storage refrigeration for hospitals or corporate offices, Accucold's additional product lines help to serve a variety of facility needs.

PURETHERM Blanket Warmers

Designed and constructed in the USA to keep **towels, blankets, and other linens properly warmed** in hospitals, clinics, spas, and other facilities



Features

Passive heating system (PTHC series) to minimize lint build up for safe, effective operation
Stainless steel or hammered aluminum interior for easy cleaning
Double pane tempered glass door provides a full view of blanket inventory
Digital thermostats ensure intuitive temperature management
Large LED readout of the temperature
Operates between 90 and 140°F
Factory-installed lock with two keys included
Silent operation (PTHC series) with no moving parts
Automatic turnoff prevents overheating
Flush design with a sealed back
Optional dollies available for easier mobility
Fully assembled in the USA

Stainless steel construction for lasting durability

SKU: PTHC65G

SKU: PTHC155G

	SKU	CAPACITY	HEIGHT X WIDTH X DEPTH	DOOR	CABINET	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	PHC51G	2 cu.ft.	29.5" x 23.38" x 19.88"	Glass	Gray	RHD	5.5	145 lbs.	ETL, ETL-C
🔒	PTHC65G	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Black	RHD	5.5	145 lbs.	ETL, ETL-C
🔒	PTHC65GLHD	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Black	LHD	5.5	145 lbs.	ETL, ETL-C
🔒	PTHC65GCSS	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Stainless Steel	RHD	5.5	150 lbs.	ETL, ETL-C
🔒	PTHC65GCSSLHD	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Stainless Steel	LHD	5.5	150 lbs.	ETL, ETL-C
🔒	PTHC125G	10.57 cu.ft.	60" x 23.63" x 23.75"	Glass	Stainless Steel	RHD	5.5	175 lbs.	ETL, ETL-C
🔒	PTHC155G	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Black	RHD	5.5	200 lbs.	ETL, ETL-C
🔒	PTHC155GLHD	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Black	LHD	5.5	200 lbs.	ETL, ETL-C
🔒	PTHC155GCSS	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Stainless Steel	RHD	5.5	215 lbs.	ETL, ETL-C
🔒	PTHC155GCSSLHD	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Stainless Steel	LHD	5.5	215 lbs.	ETL, ETL-C

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

JCAHO Compliant Nutrition Centers

Commercially approved refrigerators and freezers specifically **designed for the storage of sealed food and beverages** in a variety of facilities including break rooms, waiting areas, nurses' stations, and more

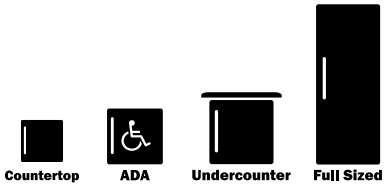

Features

Factory-installed NIST calibrated thermometer with continuous display
2-year certificate of calibration included for your records
Commercially approved to NSF-7 standards
Audible high/low temperature alarms
Factory-installed keyed locks
Adjustable shelving for easier storage
Matching refrigerator and freezer sets available
Range of sizes including countertop, undercounter, ADA compliant, and full capacity

SKU: SCR215LNZ

SKU: FF31L7NZ

SKU: SCR600BGLBINZ

SKU: FFAR121SSNZ

Refrigerators

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FFAR25L7NZ	1.7 cu.ft.	22.75" x 17" x 19.13"	White	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
🔒	SCR215LNZ	1.7 cu.ft.	22.75" x 17" x 18.75"	Glass	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
🔒	SCR312LNZ	2.5 cu.ft.	28" x 17" x 19.25"	Glass	Black	4	Freestanding	1.3	100 lbs	ETL, ETL-C, ETL-S
🔒	SCR486LNZ	3.35 cu.ft.	35.5" x 19" x 19.5"	Glass	Black	4	Freestanding	1.3	100 lbs	ETL, ETL-C, ETL-S
🔒	FF6LWBI7NZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
🔒	FF6LWBI7NZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
🔒	SCR600GLBINZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S
🔒	SCR600GLBINZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S
🔒	FFAR12WNZ	10.1 cu.ft.	60.88" x 23.63" x 22.75"	White	White	4	Freestanding	1.7	155 lbs	ETL, ETL-C, ETL-S
🔒	FFAR121SSNZ	10.1 cu.ft.	60.88" x 23.63" x 22.75"	Stainless Steel	Stainless Steel	4	Freestanding	1.7	155 lbs	ETL, ETL-C, ETL-S

Freezers

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FS24L7NZ	1.4 cu.ft.	22.25" x 18.5" x 17.63"	White	White	1	Freestanding	0.8	55 lbs	ETL,ETL-C,ETL-S
🔒	SCFU386NZ	2 cu.ft.	26.25" x 23.38" x 20.63"	Glass	Gray	2	Freestanding	4	95 lbs	ETL,ETL-C,ETL-S

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Break Room Refrigerator-Freezers

Variety of choices equipped with NIST calibrated thermometers
that provide a continuous digital display of the current and high/low temperature

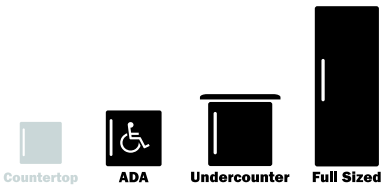

Features

Factory-installed NIST calibrated thermometer
2-year certificate of calibration included for your records
Audible high/low temperature alarm
Digital temperature readout for each section (refrigerator only for undercounter choices)
Frost-free operation in full-sized units
Adjustable shelving and door storage
Interior lighting in the fresh food compartment
User-reversible door swing to best accommodate any setting

SKU: BKRF663B

SKU: BKRF661

SKU: BKRF18SSCP with antimicrobial copper handles

SKU: BKRF21W

SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BKRF661	5.1 cu.ft	32.63" x 23.63" x 23"	White	White	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF661BIADA	5.1 cu.ft	32" x 23.63" x 23"	White	White	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF663B	5.1 cu.ft	32.63" x 23.63" x 23"	Black	Black	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF663BBIADA	5.1 cu.ft	32" x 23.63" x 23"	Black	Black	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF1118W	10.3 cu.ft	60.63" x 23.63" x 26"	White	White	3	Freestanding	1.6	105 lbs	UL, UL-C
BKRF1119BL	10.3 cu.ft	60.63" x 23.63" x 26"	Black	Black	3	Freestanding	1.6	105 lbs	UL, UL-C
BKRF1159SS	10.3 cu.ft	60.63" x 23.63" x 26"	Black	Stainless Steel	3	Freestanding	1.6	170 lbs	UL, UL-C
BKRF15W	14.75 cu.ft	61.63" x 28" x 29.38"	White	White	3	Freestanding	4.5	182 lbs	CSA
BKRF18W	18 cu.ft	67.63" x 29.63" x 30"	White	White	3	Freestanding	6	220 lbs	CSA
BKRF18B	18 cu.ft	67.63" x 29.63" x 30"	Black	Black	3	Freestanding	6	220 lbs	CSA
BKRF18SS	18 cu.ft	67.63" x 29.63" x 30"	Black	Stainless Steel	3	Freestanding	6	220 lbs	CSA
BKRF21W	20.4 cu.ft	70.5" x 29.63" x 31.75"	White	White	4	Freestanding	6	230 lbs	CSA
BKRF21B	20.4 cu.ft	70.5" x 29.63" x 31.75"	Black	Black	4	Freestanding	6	230 lbs	CSA
BKRF21SS	20.4 cu.ft	70.5" x 29.63" x 31.75"	Black	Stainless Steel	4	Freestanding	6	230 lbs	CSA

ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001:2015 CERTIFIED CALIBRATION LABORATORY

***Most units can be ordered with combination or key locks**

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

MOMCUBE Series Breast Milk Refrigeration

All-refrigerators specially designed for the unique needs of breast milk, with interior locking compartments to allow nursing mothers private storage

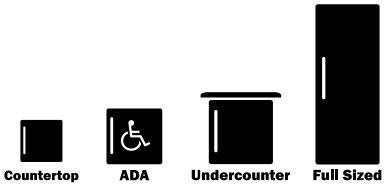

Purpose-Built for Breast Milk Storage

Designed to operate between 33 and 40°F for the proper storage of human milk
Individual locking compartments for secure, separate storage for ("LK" Series)
Combination locks allow each mother her own access system
Single key override included for staff to manage as needed
Audible/visual alarms for high/low temperature excursions
Open door alarm offers added assurance in office or hospital settings

Advanced Temperature Performance

Intelligent microprocessor digital temperature controller
Improved accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored bottles
Additional sensor reads interior air temperature for superior temperature control
Digital display of the min/max temperature (updated in 15 minute increments)
Password protection of control parameters beyond setpoint
Optimized forced air cooling for excellent temperature stability

Fully Featured Interior For Convenient Storage

Energy efficient LED lighting with internal on/off switch
½" probe port included to accept user-provided monitoring equipment

Quality Design For Reliable Performance

Self-closing door offers added storage protection
Environmentally friendly natural hydrocarbon refrigerant for reduced global warming potential
Meets EPA and SNAP requirements
Convenient security with a top-mounted front door lock (2 keys included)
Powerful magnetic door gaskets to ensure a tight seal for energy savings and improved performance

SKU: ARS8MLMCLK

MOMCUBE Freezers:

Provide additional solutions for longer term storage.
These units come with a more basic featured package.

Interior locking compartments allow private storage

Designed to maintain recommended temperature for breast milk storage

momcube®

ARS1MLMC

ARS6MLMC

ARS8MLMCLK

ARS15MLMCLK

Technical Specifications (Refrigerators*):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 33 to 40°F
Temperature variation: +/-1°C*
Shelving: Interior locking compartments or adjustable white plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock + individual combination locks with single key override ("LK" Series)
Refrigerant: Eco-friendly R600a
Light: LED

Access Port: ½"
Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:

2 keys for outer door
2 keys to override combination locks
User manual

DESIGNED TO PROVIDE +/-1°C VARIATION
The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Extended Warranty
2-year parts & labor
5-year compressor

Eco-Friendly
Uses environmentally friendly hydrocarbons for a greener footprint

Logging Option
Add our D2LB data logger for additional assurance

LOCKERS
Individual storage compartments with combination locks

Refrigerators

	MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
🔒	ARS1MLMC	1 cu.ft.	21.5" x 17.5" x 19.75"	White	White	2 shelves	0.6	70 lbs
🔒	ARS3MLMC	3 cu.ft.	34" x 18.5" x 19"	White	White	4 shelves	0.6	90 lbs
🔒	ARS6MLMC	6 cu.ft.	32.5" x 23.38" x 24.63"	White	White	4 shelves	0.75	120 lbs
🔒	ARS6MLMCLK	6 cu.ft.	32.5" x 23.38" x 24.63"	White	White	2 locking compartments	0.75	150 lbs
🔒	ARS8MLMC	8 cu.ft.	50" x 23.38" x 24.38"	White	White	7 shelves	1.4	170 lbs
🔒	ARS8MLMCLK	8 cu.ft.	50" x 23.38" x 24.38"	White	White	4 locking compartments	1.4	210 lbs
🔒	ARS12MLMC	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	7 shelves	1.4	185 lbs
🔒	ARS12MLMCLK	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	6 locking compartments	1.4	230 lbs
🔒	ARS15MLMC	15 cu.ft.	72" x 23.38" x 24.38"	White	White	7 shelves	1.4	215 lbs
🔒	ARS15MLMCLK	15 cu.ft.	72" x 23.38" x 24.38"	White	White	8 locking compartments	1.4	300 lbs

Freezers

	MODEL	CAPACITY	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
🔒	FS24LMC	1.4 cu.ft.	20" x 18.5" x 17.63"	White	White	1 wire shelf	0.8	37 lbs
🔒	FS30LMC	1.8 cu.ft.	24.5" x 18.5" x 17.75"	White	White	2 wire shelves	0.8	42 lbs
🔒	VT65MLBIMCADA	3.5 cu.ft.	32" x 23.63" x 23.5"	White	White	3 baskets	1.3	110 lbs

*** For complete freezer technical specifications, see our website**

Compact & Mid-Sized Microwaves

Commercially approved units and basic countertop microwaves for a variety of heating applications

Compact Mid-Sized

Features

Black, white, or stainless steel finish options
Commercially approved choices listed to NSF-4 standards
115V operation to work with standard outlets
Digital control pads for easy use
Savable settings for faster one-touch cooking
Can be ordered pre-mounted to virtually any Accucold or Summit refrigerator

Intuitive digital controls allow you to store settings for faster cooking

SKU: SCM1000SS

SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	FINISH	AMPERAGE	SHIPPING WT.	WATTAGE	CERTIFICATIONS
SCM853	.7 cu.ft.	11" x 18.88" x 14.25"	Stainless Steel	12	32 lbs	900W	UL, UL-C
SM901WH	.7 cu.ft.	10.25" x 17.75" x 13"	White	15	37 lbs	700W	UL, UL-C
SM902BL	.7 cu.ft.	10.25" x 17.75" x 13"	Black	15	37 lbs	700W	UL, UL-C
SM1102WH	1 cu.ft.	11.75" x 21.13" x 15.5"	White	20	37 lbs	1000W	UL, UL-C
SCM1000SS	.9 cu.ft.	12.25" x 20.25" x 14.75"	Stainless Steel	20	41 lbs	1000W	ETL, ETL-S

Icemakers & Ice/Water Dispensers

Available in a range of sizes, including countertop, undercounter, and ADA compliant for use under lower counters

Countertop | ADA | Undercounter | Full Sized

Features

Tabletop ice/water dispenser ideal for hospital waiting areas
Commercially approved choices listed to NSF-12 standards
Drain-free choice (BIM25) for versatile installation
Choices available in a lower 32" height for use under ADA compliant counters
ENERGY STAR certified choices included
High capacity production on select models
Available with an internal pump or gravity drain system

SKU: AIWD282 | SKU: BIM100 | SKU: BIM25

Ice & Water Dispenser

SKU	CAPACITY	ICE TYPE	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
AIWD282	282 lbs./day	Clear nugget	28" x 16.5" x 24.88"	Stainless Steel	Stainless Look	3.8	177 lbs	ETL, ETL-C, UL-S

Clear Icemakers (Drain Required)

SKU	CAPACITY	ICE TYPE	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BIM44G	50 lbs./day	Clear cube	33" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-S, NSF
BIM44GADA	50 lbs./day	Clear cube	32.38" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-S, NSF
BIM100	100 lbs./day	Clear cube	34.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S
BIM100ADA	100 lbs./day	Clear cube	31.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S

Crescent Icemakers (No Drain Required)

SKU	CAPACITY	ICE TYPE	HEIGHT x WIDTH x DEPTH	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BIM25	12 lbs./day	Cloudy crescent	24.75" x 15" x 18.25"	Stainless Steel	Black	1.7	53 lbs	UL, UL-S

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Portable Refrigerator/Freezers

Ensure proper cold chain management with mobile refrigeration designed for easy travel and reliable storage

Portable

Features

Includes a 12V power cord to connect to vehicle sockets
110V AC/DC power adapter included for alternate use
Factory-installed casters for smooth mobility (most models)
Flexible strap handle or trolley allows easy steering
Digital control panel ensures easy operation
Compressor-based cooling system for more stability
Can operate as a refrigerator or freezer (temperature range: 2-8°C/-12°C or -15°C)

SKU: SPRF86M2

SKU: SPRF26M

	SKU	CAPACITY	HEIGHT X WIDTH X DEPTH	FINISH	PORTABLE FEATURES	POWER	SHIPPING WEIGHT (LBS.)
	SPRF26	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Handles	12/24V DC/115V	30
🔒	SPRF26M	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Collapsible trolley	12/24V DC/115V	32
🔒	SPRF36M2	1.06 cu.ft.	24.25" x 21.63" x 14.75"	Gray	Factory-installed casters w/handle	12/24V DC/115V	50
🔒	SPRF86M2	2.8 cu.ft.	25.88" x 22" x 17.5"	Gray	Factory-installed casters w/handle	12/24V DC/115V	70

General Purpose & NSF-7 Refrigeration

Broad selection of compact, undercounter, ADA compliant, and full-sized refrigerators and freezers for a wide variety of basic storage, including choices listed to NSF-7 commercial standards.

Healthcare & General Purpose Refrigerators & Freezers

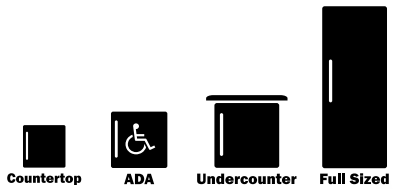

Wide selection of general purpose options ideal for non-critical storage in a variety of healthcare applications including nursing stations, waiting rooms, recovery areas, and more

Features

Factory-installed front locks for keyed security
32" high choices for use under lower ADA compliant counters
Commercially listed choices to meet NSF-7 and JCAHO guidelines
Glass and solid door models from compact to full-sized
Temperature readouts included on many models
Matching refrigerator and freezer sets
Customizable to meet your exact specifications

SKU: FFAR23LGP

SKU: ADA305FZ

SKU: FFAR10GP

All-Refrigerators

SKU	CAPACITY	HEIGHT X WIDTH X DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FFAR23LGP	1.7 cu.ft.	20.75 x 18.75 x 17.5	White	White	1 Wire	Countertop	1	40	ETL, ETL-C
FF28LWHGP	2.4 cu.ft.	24.88 x 18.5 x 17.75	White	White	1 Wire	Countertop	1.3	38	ETL, ETL-C
SCR314LDTGP	2.1 cu.ft.	26 x 18.88 x 17	Glass	Black	2 Wire	Countertop	1.3	56	ETL, ETL-C, ETL-S
ADA404REF	3.53 cu.ft.	32 x 19.75 x 22.5	White	White	3 wire	Built-in/Freestanding	1.1	70	ETL, ETL-C, ETL-S
FF511L	4.1 cu.ft.	34" X 19.25" X 21.38"	White	White	3 wire	Freestanding	1.4	60	ETL, ETL-C
SCR600GLBIADAGP	5.5 cu.ft.	32.38 x 23.63 x 23.5	Glass	White	4 Glass	Built-in/Freestanding	1.8	105	UL, ULC, ETL-S
FF7LWBIADAGP	5.5 cu.ft.	32.25 X 23.63 X 23.5	White	White	3 Wire	Built-in/Freestanding	1.4	105	UL, ULC, ETL-S
FFAR10GP	10 cu.ft.	55.63 x 23.63 x 23	White	White	4 Wire	Freestanding	1.5	140	UL, ULC

All Freezers

SKU	CAPACITY	HEIGHT X WIDTH X DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FS24LGP	1.4 cu.ft.	20 x 18.5 x 17.63	White	White	1 Wire	Countertop	0.8	40	ETL, ETL-C
FS30LGP	1.8 cu.ft.	24.63 x 18.5 x 17.75	White	White	2 Wire	Countertop	0.8	45	ETL, ETL-C
ADA305FZ	2.68 cu.ft.	32 x 19.75 x 22.5	White	White	3 pull-out baskets	Built-in/Freestanding	0.6	70	ETL, ETL-C, ETL-S
VT65MLGP	3.5 cu.ft.	33.5 x 23.63 x 23.5	White	White	3 Drawers	Freestanding	1.3	110	UL
VT65MLBIADAGP	3.5 cu.ft.	32.25 x 23.63 x 23.5	White	White	4 Drawers	Freestanding	1.3	110	UL, ULC

Refrigerator-Freezers

SKU	CAPACITY	HEIGHT X WIDTH X DEPTH	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
ADA302RFZ	2.68 cu.ft.	32 x 19.75 x 22.5	White	White	3 Glass	Built-in/Freestanding	1.1	70	ETL, ETL-C

PLUS2 Series Refrigerators & Freezers

All-refrigerators and matching all-freezers **equipped with NIST calibrated thermometer**s to provide an **external display in general purpose storage applications**

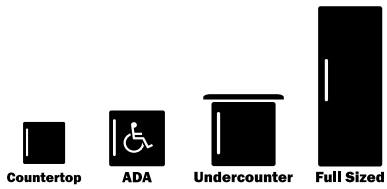

Advanced Temperature Control

Digital control panel for easy temperature management
Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree

NIST Calibrated Monitoring

Alarm/thermometer with continuous external readout of the current and high/low temperature
Buffered temperature probe in glycol-filled bottle
Certificate of NIST calibration included (2-years)
Audible alarm for high/low temperature excursions

User-Friendly Features

Adjustable shelves or slide-out drawers for easy storage
Hospital grade cord and plug for added assurance in high traffic settings
Front-breathing options for built-in installation under counters
Matching refrigerator and freezer sets
Variety of sizes including countertop, undercounter, ADA compliant, and larger capacity

Quality Design For Reliable Performance

Factory-installed locks front-located for convenient security
Fan-forced cooling to promote even temperature distribution
Powerful magnetic door gaskets to ensure a tight seal for energy savings and improved performance

SKU: FF6LWBIPLUS2ADA

Refrigerators

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	FINISH	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FF28LWHPLUS2	2.4 cu.ft.	24.5” x 18.5” x 17.75”	White	1	Freestanding	1.3	38 lbs.	ETL, ETL-C
🔒	FF6LWPLUS2	5.5 cu.ft.	33.5” x 23.63” x 23.5”	White	3	Freestanding	1.3	105 lbs.	ETL, ETL-C
🔒	FF6LWBIPLUS	5.5 cu.ft.	33.5” x 23.63” x 23.5”	White	3	Built-in/Freestanding	1.3	105 lbs.	ETL
🔒	FF6LWBIPLUS2ADA	5.5 cu.ft.	32” x 23.63” x 23.5”	White	3	Built-in/Freestanding	1.3	105 lbs.	ETL-C
🔒	FFAR10PLUS2	10.1 cu.ft.	56” x 23.63” x 23”	White	4	Freestanding	1.5	145 lbs.	ETL, ETL-C

Freezers

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	FINISH	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	FS24LPLUS2	1.4 cu.ft.	19.63” x 18.5” x 17.63”	White	1	Freestanding	0.8	37 lbs.	ETL, ETL-C
🔒	FS30LPLUS2	1.8 cu.ft.	24.5” x 18.5” x 17.75”	White	2	Freestanding	0.8	53 lbs.	ETL, ETL-C

Refrigerator-Freezers

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	FINISH	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	CP351WLLF2PLUS2	2.9 cu.ft.	32.88” x 18.5” x 20.25”	White	1	Freestanding	1.4	93 lbs.	ETL, ETL-C
🔒	CP351WLLF2PLUS2ADA	2.9 cu.ft.	32” x 18.5” x 20.25”	White	1	Freestanding	1.4	93 lbs.	ETL, ETL-C

More choices available. See our website for our complete selection

Low Temperature Freezers

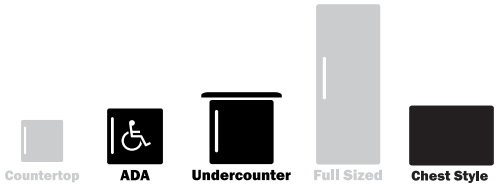

From laboratory research to veterinary storage, Accucold's **low temperature freezers** serve a variety of storage functions in a range of sizes to fit any facility's space

Low Temperature Storage

Digital control panel for easy temperature management
Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree
Choices for -45, -35, or -30°C operation
NIST calibrated thermometers included on VT/VLT series

Variety of Sizes & Styles

Front-opening choices available in standard undercounter & ADA compliant height
Chest style units from 28" to 86" wide

User-Friendly Features

Counterbalanced hinges to ensure safer loading
Easy-grip handle (most models)
Stainless steel corner protectors (VT/VLT series) for added durability
Casters included on EL series

Quality Design For Reliable Performance

Factory-installed locks for convenient security
Extra thick insulation for improved efficiency
Powerful magnetic door gaskets to ensure a tight seal for energy savings and improved performance
Commercially approved to NSF-7 standards (Most units)

SKU: EL11LT

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	FINISH	STYLE	SET POINT RANGE	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒	EL11LT	4.8 cu.ft.	33.5" x 28.5" x 27.25"	White	Chest	-45 to 0°C	7.2	115 lbs.	UL, UL-C, UL-S
🔒	EL21LT	8.4 cu.ft.	33.5" x 41.5" x 27.25"	White	Chest	-45 to 0°C	7.2	135 lbs.	UL, UL-C, UL-S
🔒	EL31LT	11.1 cu.ft.	33.5" x 51.38" x 27.25"	White	Chest	-45 to 0°C	7.2	157 lbs.	UL, UL-C, UL-S
🔒	EL41LT	12.8 cu.ft.	33.5" x 59.25" x 27.25"	White	Chest	-45 to 0°C	7.2	177 lbs.	UL, UL-C, UL-S
🔒	EL51LT	15.5 cu.ft.	33.5" x 67" x 27.25"	White	Chest	-45 to 0°C	7.1	220 lbs.	UL, UL-C, UL-S
🔒	VLT650	3.5 cu.ft.	33.5" x 23.63" x 23.5"	White	Front-Opening	-35 to -15°C	15	135 lbs.	UL, UL-C, UL-S
🔒	VLT650ADA	3.5 cu.ft.	32" x 23.63" x 23.5"	White	Front-Opening	-35 to -15°C	15	135 lbs.	UL, UL-C, UL-S
🔒	VLT850	9 cu.ft.	33" x 45.75" x 24"	White	Front-Opening	-35 to -15°C	1.4	110 lbs.	UL, UL-C, UL-S
🔒	VLT1250	14.4 cu.ft.	33.25" x 55.5" x 28.63"	White	Chest	-35 to -15°C	1.49	235 lbs.	UL, UL-C, UL-S
🔒	VLT1750	18 cu.ft.	33.25" x 66.75" x 28.63"	White	Chest	-35 to -15°C	1.4	175 lbs.	UL, UL-C, UL-S
🔒	VLT2250	24.8 cu.ft.	32" x 85.25" x 31.5"	White	Chest	-35 to -15°C	3.1	230 lbs.	UL, UL-C, UL-S
🔒	VT44	3.5 cu.ft.	32.75" x 21.25" x 23"	White	Chest	-35 to -15°C	1.5	115 lbs.	ETL, ETL-C
🔒	VT65	3.5 cu.ft.	33.5" x 23.63" x 23.5"	White	Front-Opening	-30 to -15°C	15	105 lbs.	UL, UL-C, UL-S
🔒	VT650ADA	3.5 cu.ft.	32" x 23.63" x 23.5"	White	Front-Opening	-30 to -15°C	15	105 lbs.	UL, UL-C, UL-S
🔒	VT85	9 cu.ft.	33" x 45.75" x 24"	White	Chest	-30 to -15°C	1.4	110 lbs.	UL, UL-C, UL-S
🔒	VT125	14.1 cu.ft.	33.25" x 55.5" x 28.63"	White	Chest	-30 to -15°C	1.49	250 lbs.	UL, UL-C, UL-S
🔒	VT175	18 cu.ft.	33.25" x 66.75" x 28.63"	White	Chest	-30 to -15°C	1.4	175 lbs.	UL, UL-C, UL-S
🔒	VT225	24.8 cu.ft.	32" x 85.25" x 31.5"	White	Chest	-30 to -15°C	3.1	240 lbs.	UL, UL-C, UL-S

***Specifications are subject to change without notice. For the most current information, visit accucold.com**

Commercial Chest Freezers

Our **commercially listed chest series** includes **frost-free refrigerators and freezers**, as well as manual defrost chest freezers to meet a variety of **general purpose storage needs**

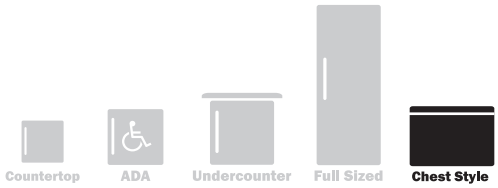

Features

Stainless steel corner protectors for added durability in high traffic areas
Commercially approved to NSF-7 standards
Counterbalanced hinges to ensure safer loading
Easy-grip handle (most models)
Factory-installed keyed locks (most models)
Choice of frost-free operation or static manual defrost
Digital controls with external temperature readout on frost-free EQ series
Pre-installed probe hole included on frost-free EQ series
Front-located dial controls on manual defrost SCFM series

Frost-free operation adds convenience to a design previously limited to manual defrost

SKU: EQFR71

	SKU	CAPACITY	HEIGHT x WIDTH x DEPTH	SET POINT RANGE	AMPERAGE	SHIPPING WT.	DEFROST	CERTIFICATIONS
🔒	EQFR71	8 cu.ft.	33" x 44" x 24"	36°F to 46°F	1.4	110 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFR121	13.1 cu.ft.	33.25" x 53.75" x 28.63"	36°F to 46°F	1.49	145 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFR151	17.1 cu.ft.	33.25" x 65" x 30.25"	36°F to 46°F	1.4	175 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFR221	23.8 cu.ft.	32" x 83.25" x 31.5"	36°F to 46°F	3.1	210 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFF72	8 cu.ft.	33.25" x 44" x 24"	-5°F to 12°F	1.4	110 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFF122	13.1 cu.ft.	33.25" x 53.75" x 28.63"	-5°F to 12°F	1.49	162 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFF152	17 cu.ft.	33.25" x 65" x 30.25"	-5°F to 12°F	1.4	175 lbs	Frost-Free	UL, UL-C, UL-S
🔒	EQFF222	23.8 cu.ft.	32" x 83.25" x 31.5"	-5°F to 12°F	15	210 lbs	Frost-Free	UL, UL-C, UL-S
	SCFM62	7 cu.ft.	32" x 38.5" x 22.13"	-22 to 10.4°F	1.4	93 lbs	Manual	UL, UL-C, UL-S
	SCFM92	9 cu.ft.	33" x 44" x 24"	-22 to 10.4°F	5	135 lbs	Manual	UL, UL-C, UL-S
	SCFM162	14.1 cu.ft.	33.25" x 53.75" x 28.63"	-22 to 10.4°F	1.49	140 lbs	Manual	UL, UL-C, UL-S
	SCFM182	18 cu.ft.	33.25" x 65" x 28.63"	-22 to 10.4°F	1.4	197 lbs	Manual	UL, UL-C, UL-S
🔒	SCFM232	24.8 cu.ft.	32" x 83.25" x 31.5"	-10 to 10°F	3.1	230 lbs	Manual	UL, UL-C, UL-S
🔒	SCFM252W	26.66 cu.ft.	36.75" x 91.25" x 28.25"	-10 to -26°C	3.8	270 lbs	Manual	UL, UL-C, UL-S

Product Options & Accessories

Virtually all Accucold refrigerators and freezers and be configured to meet the unique needs of any office, laboratory, clinic, hospital, pharmacy, or other institution.

NIST Calibrated Temperature Monitoring

Our ISO/IEC 17025:2017 certified laboratory allows us to calibrate temperature monitoring equipment to NIST standards in our own facilities, ensuring accurate temperature readings for your records.

OPTION: DL2BKIT

USB Digital Data Logger

Available installed on your equipment or for aftermarket use, the DL2B DDL with alarm provides virtually unlimited logging memory to record unit temperature to your user-set logging intervals. To help support meeting CDC/VFC guidelines, this logger also keeps the current and high/low temperature in view

OPTION: DLSA11CAL-24P

Portable Loggers

Available in 12 or 24 packs, the DLSA loggers are ideal for cold chain management during the transportation process, with an integrated USB to ensure easy record keeping with downloadable software

New Solutions to Reduce the Spread of Germs

OPTION: STO

Step-To-Open Door Pedal

Factory-installed on select refrigerators and freezers, allowing staff to open a unit's door with a light step

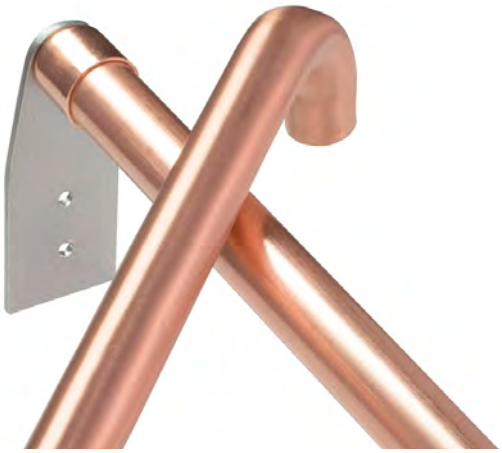

OPTION: TBC OPTION: CP

Antimicrobial Copper Handles

Towel bar or pipe style handles in pure antimicrobial copper installed on select refrigerators and freezers

Additional Options:

OPTION: DR

Interior Options
Full-extension ventilated drawers
Locking compartments for individual access
Access ports with dry contacts
⅜" or ½" probe holes

OPTION: STACKING RACK

Exterior Options
Temperature alarms with external readouts
Self-closing door swings
Dollies or NSF-listed 3"/6" locking casters
Hospital grade cord with 'green dot' plugs
Stainless steel exterior finishing
Fan-assist options for compact units
Stacking racks to combine units

OPTION: ALARM

Additional Services
Temperature displays in °F or °C
Door reversals
Pyxis-ready doors

OPTION: PF1KIT

Audible Alarms
Power-out alarms
High/low temperature alarms
Open door alarms

OPTION: KAL

Locking Options
Keyless Access Lock
Battery or AC powered keypad locks
Combination lock with key override

All NIST calibrated equipment
can be re-calibrated after its certification expires by sending the device or probe to our ISO/IEC 17025:2015 certified laboratory

Additional options are available
Contact our product specialists for more information on how we can customize any unit to your facility's precise storage needs

accucold

Learn more online at accucold.com.
For additional assistance, place refer to the directory below.

Sales Assistance:
888.4.MEDLAB ext. 509
info@accucold.com

Service Help:
888.4.MEDLAB ext. 508
service@summitappliance.com

Technical Support:
888.4.MEDLAB ext. 513
techsupport@summitappliance.com

Replacement Parts:
888.4.MEDLAB ext. 512
parts@summitappliance.com

Medical, Laboratory, Pharmacy, & Life Science Cold Storage

20200925